

Gary Worley, Precinct #1
Joel Kelton, Precinct #2



Wayne Shaw, Precinct #3
Larry Traweek, Precinct #4

E. Ray West, III
County Judge

**AMENDMENT OF UNIFORM STANDARDS FOR LINES AND STRUCTURES
IN THE COUNTY RIGHT OF WAY**

Brown County may at any time be conducting routine repair and/or maintenance within its right of ways. These include but are not limited to:

- Any surface preparation
- Paving
- Grading
- Compaction of roadways
- Blading of bar ditches and waterways to fence or boundary line
- Recovery of materials washed from roadway
- Removal of sediment and debris from waterways, culverts, bridges, etc.
- Mowing
- Trimming of trees and/or brush
- Control of vegetation that obstructs roadway or vision of roadway and signage

Mailboxes and trash containers should be 4 feet from the edge of the traveled roadway and at least 6 inches from the edge of gravel shoulder if one is provided

Any utilities to be installed in the County right of way must be requested and approved through Commissioners Court.


Underground utilities: Phone, fiber optic, oil, gas, water, electric, etcetera must be buried and maintained at least 24" to 30" from the lowest point in the bar ditch. Over a period of time, erosion and other forces can change the depth of which these utilities are buried beneath the surface. It is the responsibility of the owner of said utilities to periodically locate these utilities and maintain their proper depth and proper signage. Pedestals, meters, flush valves, standpipes, signage, etcetera must be clearly visible and free of debris and vegetation so as to be clearly seen by operators of mowers and equipment. High pressure oil and gas lines and electric lines must be clearly marked to determine entire path within right of way to prevent possible injury or death to maintenance workers.

May 1, 2017
(Exhibit #4)


Overhead utilities: Should be no less than 16 feet above the highest point of the roadway and meet all State and Federal regulations.

Brown County is not and will not be responsible for damage to utility equipment that does not meet requirements as described. If at any time Brown County anticipates that it may be necessary to work at or below a depth of 24 inches or observe other indications of utility lines that are not at least at 24 inches in depth, Dig Tess (811) will be notified. The County is not and shall not be responsible for damages to utilities located in a County Right of Way caused by third parties.


Amended and Adopted on this 1st day of May, 2017 in Brown County Commissioners Court by:



E. Ray West III
Brown County Judge




Gary Worley
Commissioner, Precinct 1



Joel Kelton
Commissioner, Precinct 2




Wayne Shaw
Commissioner, Precinct 3

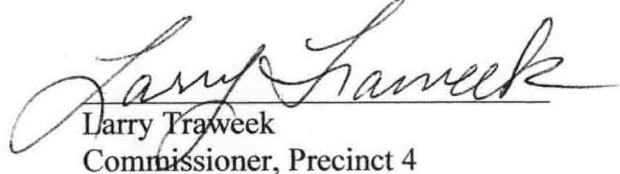

Larry Traweek
Commissioner, Precinct 4

Attest:



Sharon Ferguson
County Clerk

